

S4E315-AP18-30

# AC axial fan with guard grille for short nozzle

sickled blades (S series)



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

74673 Mulfingen

Phone: +49 7938 81-0

Fax: +49 7938 81-110

www.ebmpapst.com

info1@de.ebmpapst.com

## Nominal data

Type S4E315-AP18-30

Motor M4E068-DF

Phase		1~	1~
Nominal voltage	[V]	230	230
Frequency	[Hz]	50	60
Type of data definition		rfa	rfa
Valid for approval / standard		CE	CE
Speed	[min <sup>-1</sup> ]	1410	1650
Power input	[W]	102	120
Current draw	[A]	0,52	0.53
Motor capacitor	[μF]	4	4
Capacitor voltage	[VDB]	400	400
Max. back pressure	[Pa]	120	120
Max. ambient temperature	[°C]	55	55
Air flow	[m <sup>3</sup> /h]	2440	2840
Back pressure	[Pa]	0	0
Sound pressure level	[dB(A)]	59	64

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

S4E315-AP18-30

# AC axial fan with guard grille for short nozzle

onlinecomponents.com  
sickled blades (S Series)


## Technical features

Size	315 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Counter-clockwise, seen on rotor
Direction of air flow	"V"
Insulation class	"B"
Cable exit	Axial
Bearing motor	Ball bearing
Mass	2.4 kg
Material of electronics housing	Rotor: Coated in black
Material of impeller	Sheet steel, coated in black
Motor protection	Thermal overload protector (TOP) wired internally
Product conforming to standard	CE
Number of blades	5
Type of protection	IP 44 - depending on position
Protection class	I
Approval	CCC; GOST

S4E315-AP18-30

AC axial fan with guard grille for short nozzle  
sickled blades (S series)  
onlinecomponents.com

Product drawing

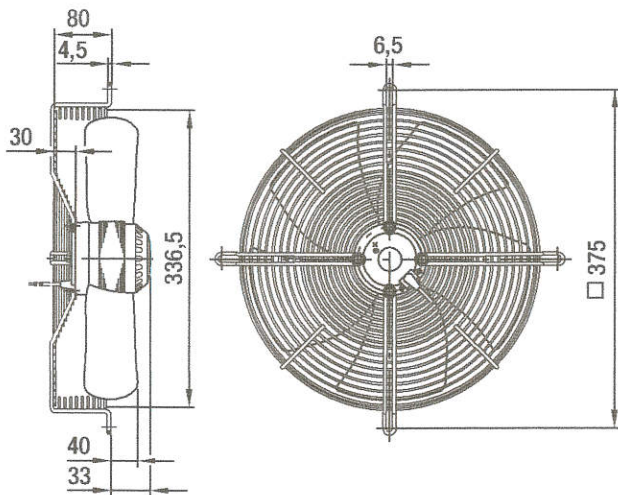


S4E315-AP18-30


AC axial fan with guard grille for short nozzle  
sickled blades (S series)

onlinecomponents.com

#### Connection screen

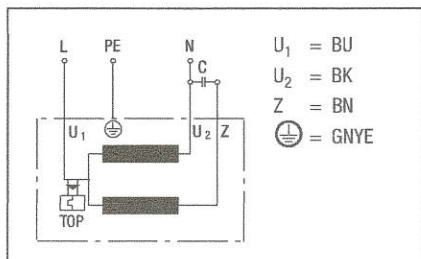

## Charts: Air flow 50 Hz

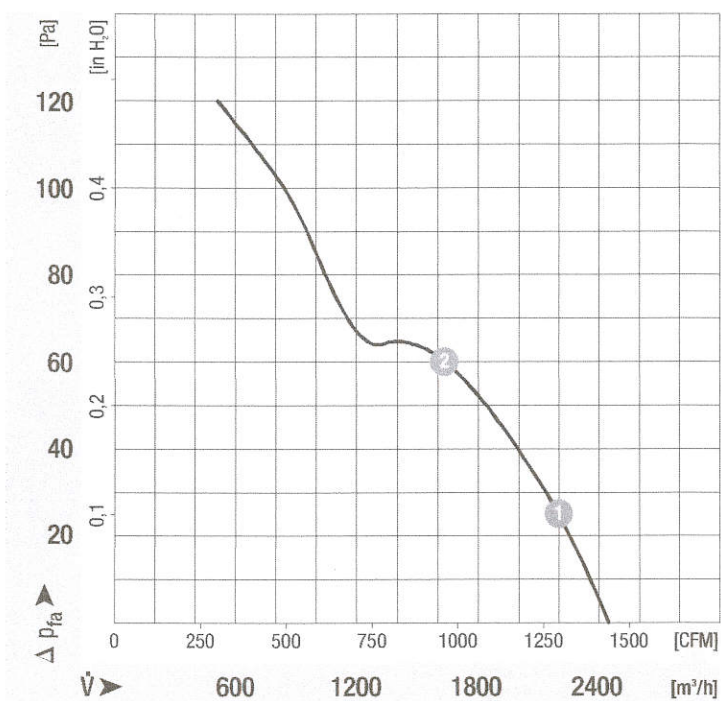

## Measured values

	n	P <sub>1</sub>	I
	[min <sup>-1</sup> ]	[W]	[A]
1	1400	108	0.54
2	1380	120	0.57



## Charts: Air flow 60 Hz

